

Specifications

Benefits / Features

- Only for use with 600 or 750 Watt 400Volt lamps
- System design and concept by GAVITA
- Very low heat dissipation and optimal cooling
- Easy mounting and maintenance



Technical specifications:

Light source
Voltage / frequency
Normal current
Total power consumption
Apparent power
Power factor $\cos \phi$
Tolerance
Electrical insulation
Input for installation cable
Connection: "slide in"
Weight, excl. lamp and reflector, kg
Dimensions, excl. lamp and reflector, mm

Connection 750 Watt

Lucalox^{LD} PSL 750 W 400 V E 40
390 / 400 V 50Hz
2,30 A
810 W
890VA
> 0,9 i
+/- 5%
Class I / IP 23
IP 68 nipple input 2 x M25
Ø until 4 mm / 25 A
7,8 kg
450 x 140 x 110 mm



Connection 600 Watt

HPS 600 W 400 V E 40
390 / 400 V 50Hz
1,85 A
650 W
720 VA
> 0,9 i
+/- 5%
Class I / IP 23
IP 68 nipple input 2 x M25
Ø until 4 mm / 25 A
7,8 kg
450 x 140 x 110 mm

Compatible lamps:

Lucalox PSL 750W 400V (GE)

Lucalox PSL 600W 400V (GE)
Planta Star 600W 400V (OS)
Green Power 600 W 400V (Ph)

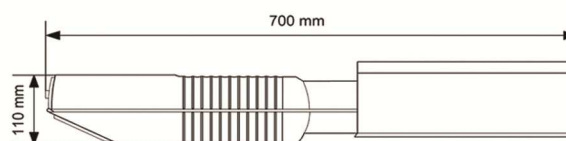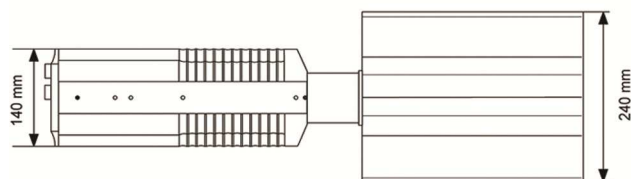

Article number

FV630

Description

GAN 6-750 AL 390/400V 50 Hz SuperAgro

Complete with 750Watt or 600 Watt HPS lamp, reflector and standard hooks for rails.

Changes reserved

GAVITA AS

Moreneveien 1, NO-3158 Andebu

T +47 33438080 F +47 33438081

info@gavita.com www.gavita.com